

XZ7

ATF (ADVANCED TRAINING FRAME) OWNER'S MANUAL

15U

CAUTION! Read all precautions and instructions in this manual
before using this equipment.

! CAUTION

Read all precautions and instructions in this manual before using this equipment.

Table Of Contents

Important Safety Instructions-----	3
Instructions-----	5
Exploded View and Parts List-----	6
Measurement Guide-----	11
Assembly Instructions-----	12
Assembly-----	13
Exercise Instructions-----	25
Maintenance Schedule-----	26
General Maintenance Information-----	27
Weight Training Tips-----	28

Important Safety Instructions

Before beginning any fitness program, you should obtain a complete physical examination from your physician. When using exercise equipment, basic precautions should always be taken, including the following:

1. Read all instructions before using the equipment.
These instructions are written to ensure your safety and to protect the unit.
2. Use the equipment only for its intended purpose as described in this guide.
Do not use accessory attachments that are not recommended by the manufacturer: such attachments might cause injuries.
3. The product should only be used on a level surface and is with 0.5 meters space around the product.
Do not use the equipment outdoors.
4. Do not allow children on or near the equipment. And children are not allowed to use this equipment.
Teenagers should use this equipment with adult supervision.
5. Do not overexert yourself or work to exhaustion.
Do not attempt to lift more weight than you can control safely.
If you feel any pain or abnormal symptoms, stop your workout immediately and consult your physician.
6. This equipment is not used as medical apparatus and instruments.
7. Never operate the unit when it has been dropped or damaged.
Never drop or insert anything into any opening in the equipment.
Always check the unit and its cables before each use. Make sure that all fasteners and cables are secure and in good working condition.
Frayed or worn cables can be dangerous and may cause injury. Periodically check these cables for any indication of wear.
Keep hands, limbs, loose clothing and long hair well out of the way of moving parts.
8. Be careful when getting on or off the equipment.
9. Wear proper exercise clothing and shoes for your workout, no loose clothing.


Important Safety Instructions

Personal Safety During Assembly

Read each step in the assembly instructions and follow the steps in sequence. Do not skip ahead. If you skip ahead, you may learn later that you have to disassemble components and that you may have damaged the equipment.

Assemble and operate the equipment on a solid, level surface. Locate the unit a few feet from walls or furniture to provide easy access. The equipment is designed for your enjoyment. By following these precautions and using common sense, you will have many safe and pleasurable hours of healthful exercise with the equipment.

Training Area and Free Area

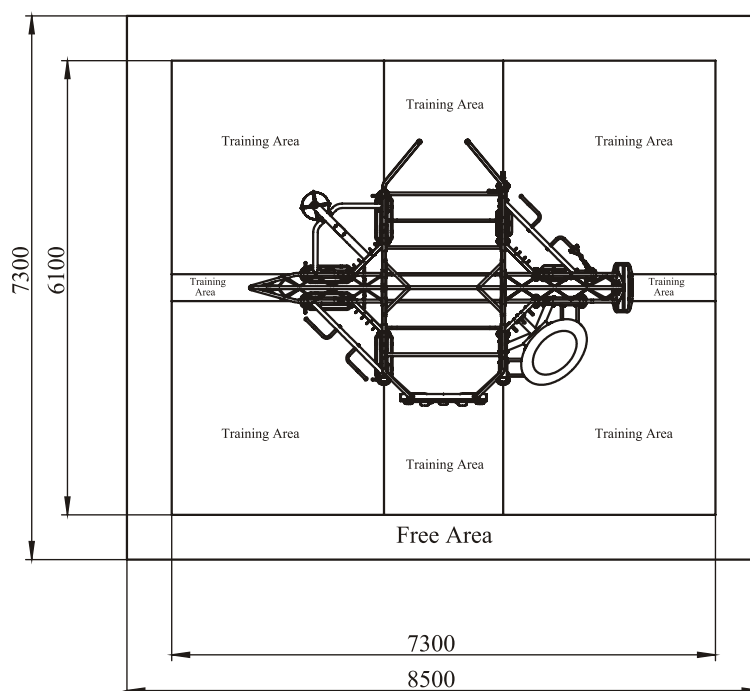

Specifications

Class: S

Maximum Wt. Capacity: 300kg/ 660lbs

Maximum User Weight: 150kg/ 330lbs

Product Total Surface: 5150*3570 mm


Product Total Mass: 257kg/ 567lbs

Instructions


Before beginning assembly please take the time to read instructions thoroughly. Please use the various lists in this manual to make sure that all parts have been included in your shipment. When ordering, use part number and description from the lists. Use only our replacement part when servicing. Failure to do so will void your warranty and could result in personal injury.

The equipment is designed to provide the smoothest, most effective exercise motion possible. After assembly, you should check all functions to ensure correct operation. If you experience problems, first recheck the assembly instructions to locate any possible errors made during assembly. If you are unable to correct the problem, call your authorized dealer. Be sure to have your serial number and this manual when calling. When all parts have been accounted for, continue on.


Tools Required




Ratchet Wrench and Socket




Adjustable Wrench



Rubber Mallet




Hex Key Wrench Set



Phillips Screwdriver

Exploded View and Parts List


Rock Climbing Plate ASSY

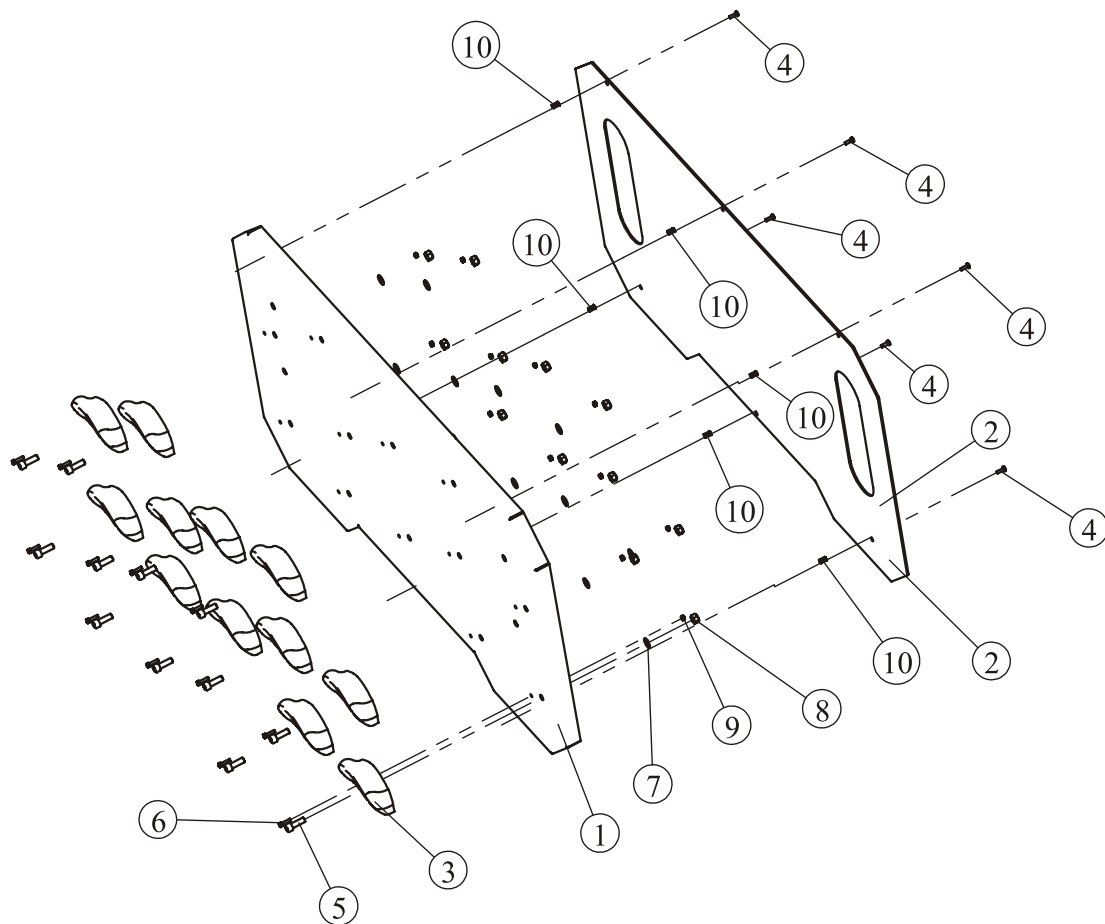

ITEM NO.	Description	QTY
1	Rock climbing Frame	1
2	Rock climbing Cover plate	1
3	Rock bit	12
4	Screws M5*15	6
5	Socket Head Cap Screw M10*30	12
6	Socket Head Cap Screw M5*20	12
7	Flat Washer $\Phi 11 * \Phi 20 * 1.5$	12
8	Nylon Lock Nut M10	12
9	Nylon Lock Nut M5	12
10	Rivet nut M5	6

Exploded View and Parts List


Wall Ball Frame ASSY

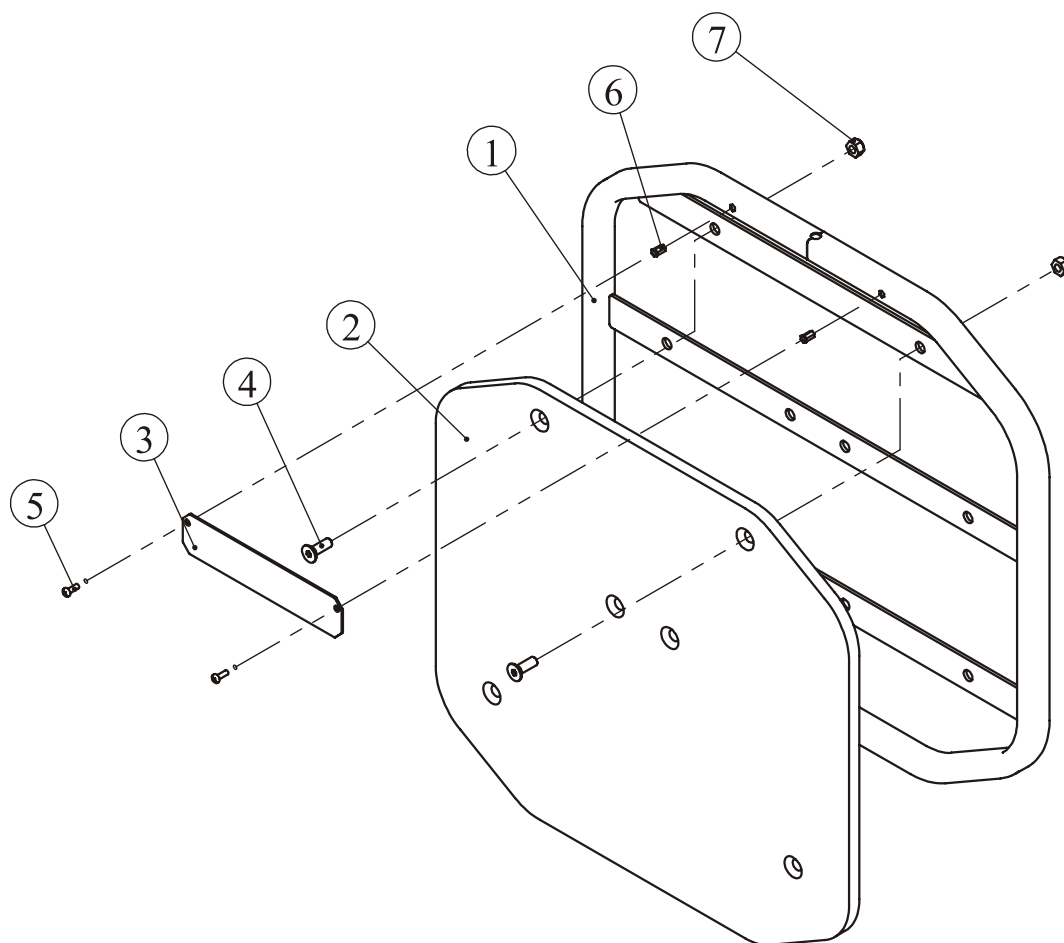

ITEM NO.	Description	QTY
1	Wall ball Frame	1
2	Wall ball Plate	1
3	LOGO plate	1
4	Flat Head Cap Screw M10*30	2
5	Screws M5*15	2
6	Rivet nut M5	2
7	Nylon Lock Nut M10	2

Exploded View and Parts List

Inverted Support Plate ASSY

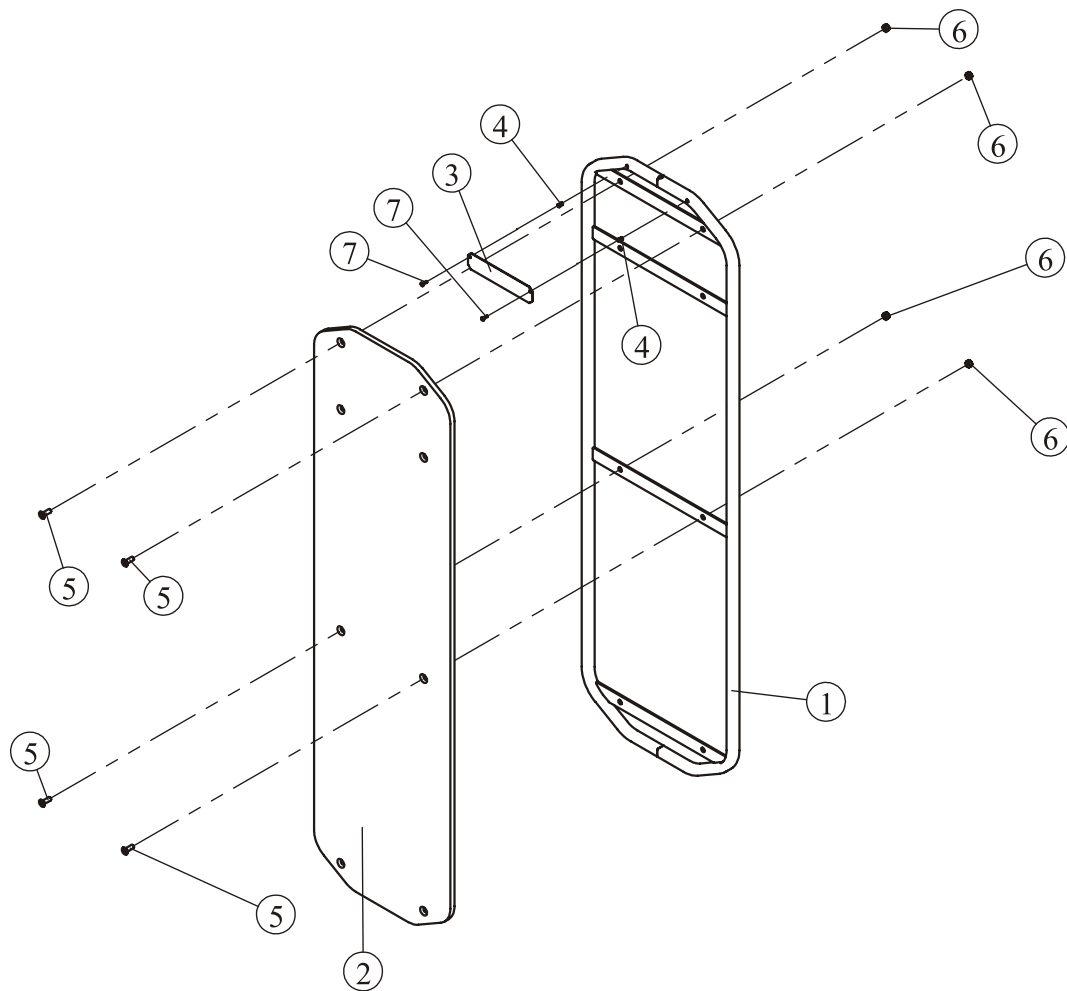

ITEM NO.	Description	QTY
1	Inverted support Frame	1
2	Inverted support plate	1
3	LOGO plate	1
4	Rivet nut M5	2
5	Flat Head Cap Screw M10*30	4
6	Nylon Lock Nut M10	4
7	Screws M5*15	2


Exploded View and Parts List

Overall


ITEM NO.	Description	QTY
1	Left Climbing supporting frame	1
2	Right Climbing supporting frame	1
3	Rock climbing Plate ASSY	1
4	Left Rings supporting frame	1
5	Right Rings supporting frame	1
6	Climbing rope supporting frame	1
7	Wall ball supporting frame	1
8	Wall ball Frame ASSY	1
9	Main support frame	1
10	Auxiliary support frame	2
11	Straight ladder beam	4
12	Bending ladder beam	3
13	Curved plate	10
15	Fixed plate	2
16	Inverted support plate ASSY	1
31	Hex Head Bolt M10*30	16
32	Flat Head Cap Screw M10*35	8
33	Button Head Cap Screw M10*50	4
34	Hex Head Bolt M10*35	4
35	Hex Head Bolt M10*75	32
36	Hex Head Bolt M10*80	12
37	Nylon Lock Nut M10	12
38	Spring Washer $\Phi 11*\Phi 20*1.5$	12
39	Nylon Lock Nut M10	48
40	Spring Washer $\Phi 11*\Phi 20*2$	112
41	Spring Washer $\Phi 10$	16
42	Fast joint	1

Exploded View and Parts List

Overall

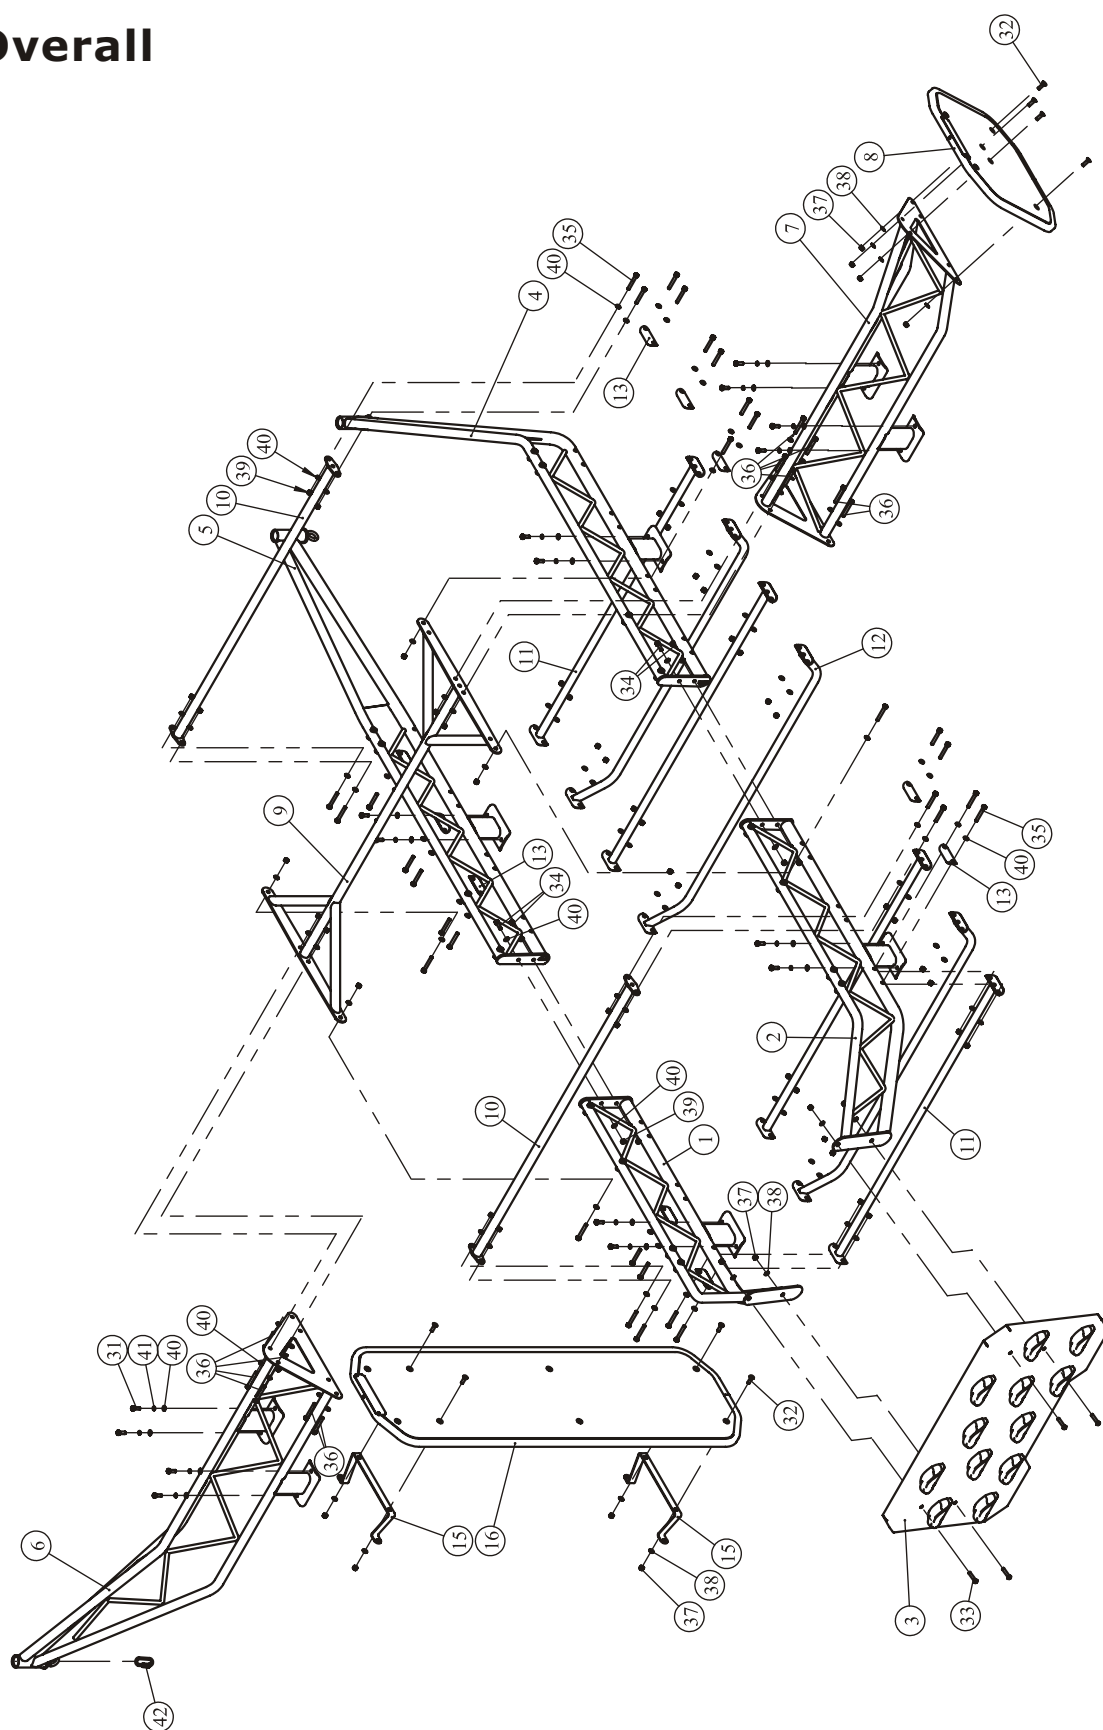

Measurement Guide

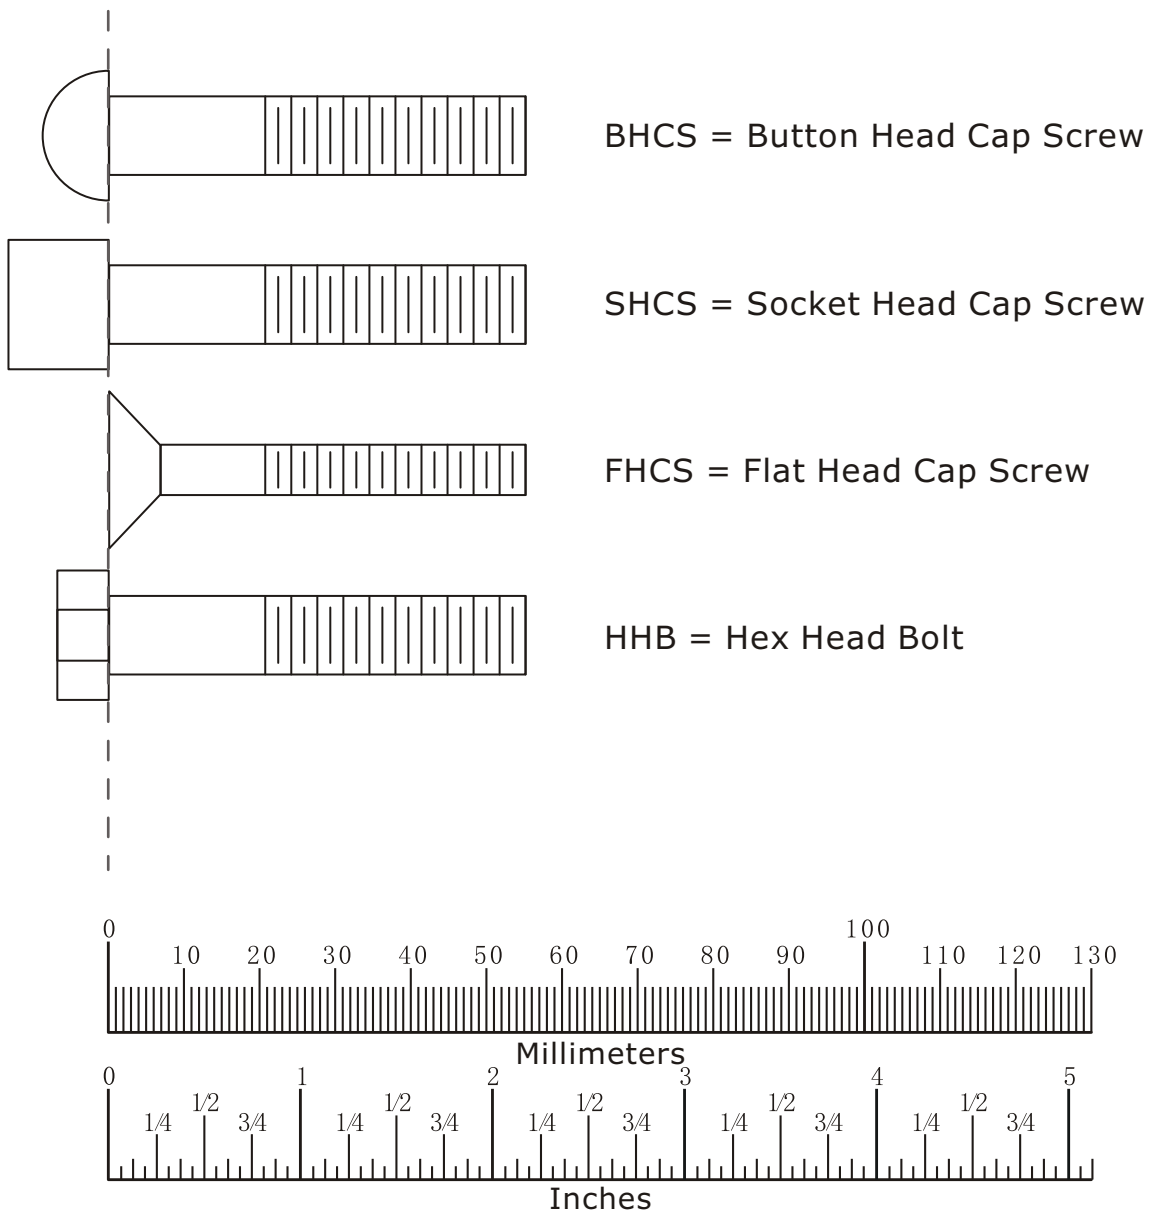

Diameter of bolt (mm/inch)	M6(1/4")	M8(5/16")	M10(3/8")	M12(1/2")	M16(5/8")
Tightening torque (N.m)	9~12	22~30	45~59	78~104	193~257
Operational methods for adult men	The strength of the wrist	The strength of the wrist and forearm	The strength of the entire arm	The strength of the arm and upper body	with all strength

Assembly Instructions

Assembly of the equipment takes professional installers about 2 hours. If this is the first time you have assembled this type of equipment, plan to spend more time. It is strongly recommended to assemble the equipment by professional installers. You may find it quicker, safer, easier to assemble this equipment with the help of a friend, as some of components may be large, heavy or awkward to handle alone. It is important that you assemble your product in a clean, clear, uncluttered area. This will enable you to move around the product while you are fitting components and reduce the possibility of injury during assembly.

NOTE

As with any assembled part, proper alignment and adjustment is critical. While tightening the fasteners, be sure to leave room for adjustments. Do not fully tighten the fasteners until instructed to do so. Be careful to assemble the components in the sequence presented in this guide.

All equipment must be anchored to the floor to prevent movement and increase stability.

Due to the wide variation of flooring on which the unit can be installed, contact a qualified contractor to determine an appropriate fastening system for your floor.

Use 3/8" diameter hardware (10 mm) to anchor the machine. Anchors should have a minimum pull out force of 220 lbs (110 kgs) for each position.

When attaching the machine to the floor, if there is a gap between the machine foot (or bracket) and the floor, do not use the anchor to remove the gap as this can cause the machine frame to deform. Instead, place a shim between the bottom of the foot and the floor, then tighten the anchor.

Assembly


NOTE:

Need to determine the basis of four stations before installation: IZ7001, IZ7002B, IZ7003, IZ7005, Assembly according to the picture.

NOTE: The relative position and size 1600mm & 360mm

Warning:

Remember to protect the four station at bottom during assembly to avoid any incline.

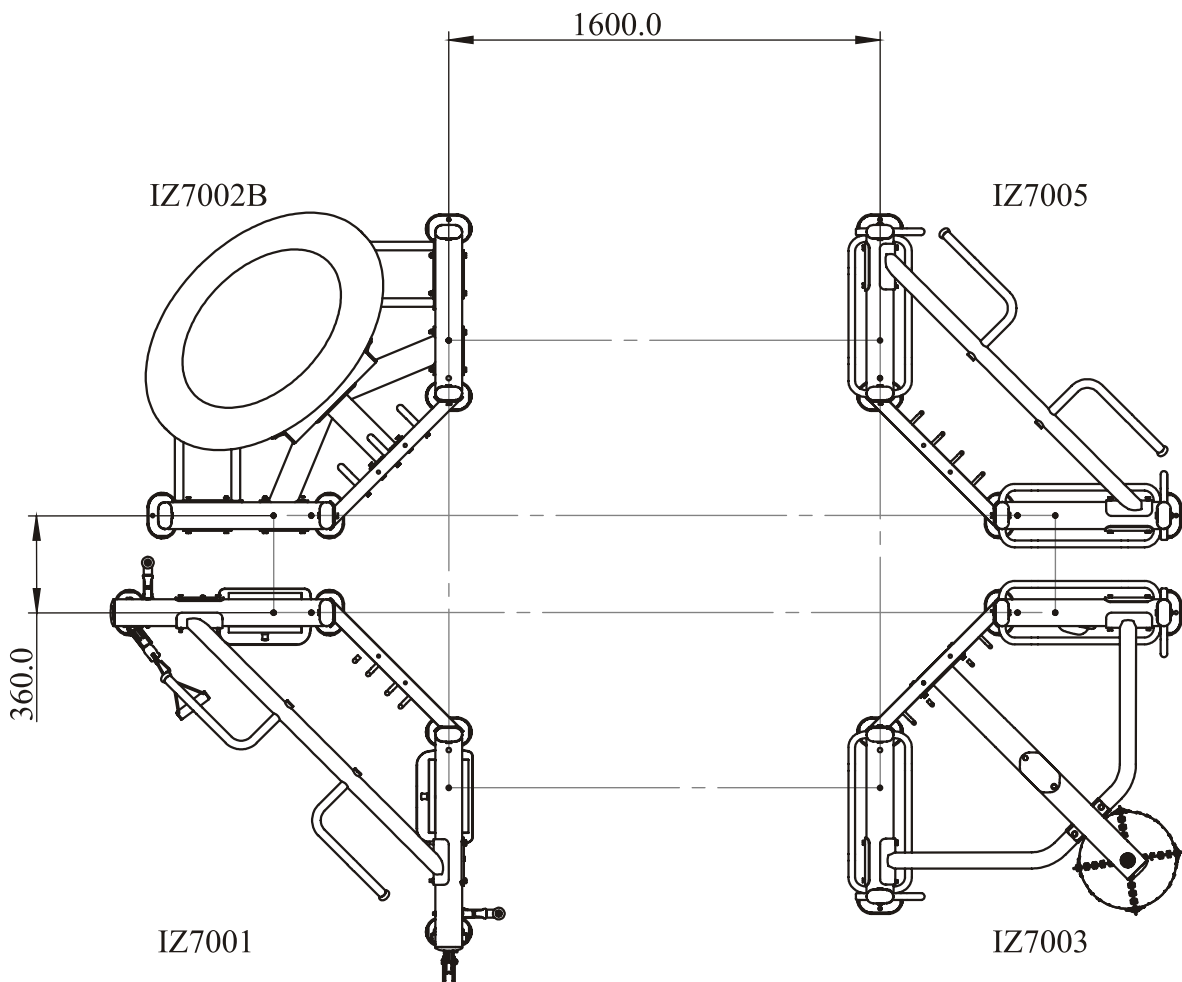

Assembly

STEP 1


1. Attach Left Climbing supporting frame (#1) to the IZ7001, using:

- two M10*30 HHB (#31)
- two Spring Washer $\Phi 10$ (#41)
- two $\Phi 11*\Phi 20*2$ Flat Washers(#40)

2. Attach Right Climbing supporting frame (#2) to the IZ7003, using:

- two M10*30 HHB (#31)
- two Spring Washer $\Phi 10$ (#41)
- two $\Phi 11*\Phi 20*2$ Flat Washers (#40)

Note: To not tighten the screws.

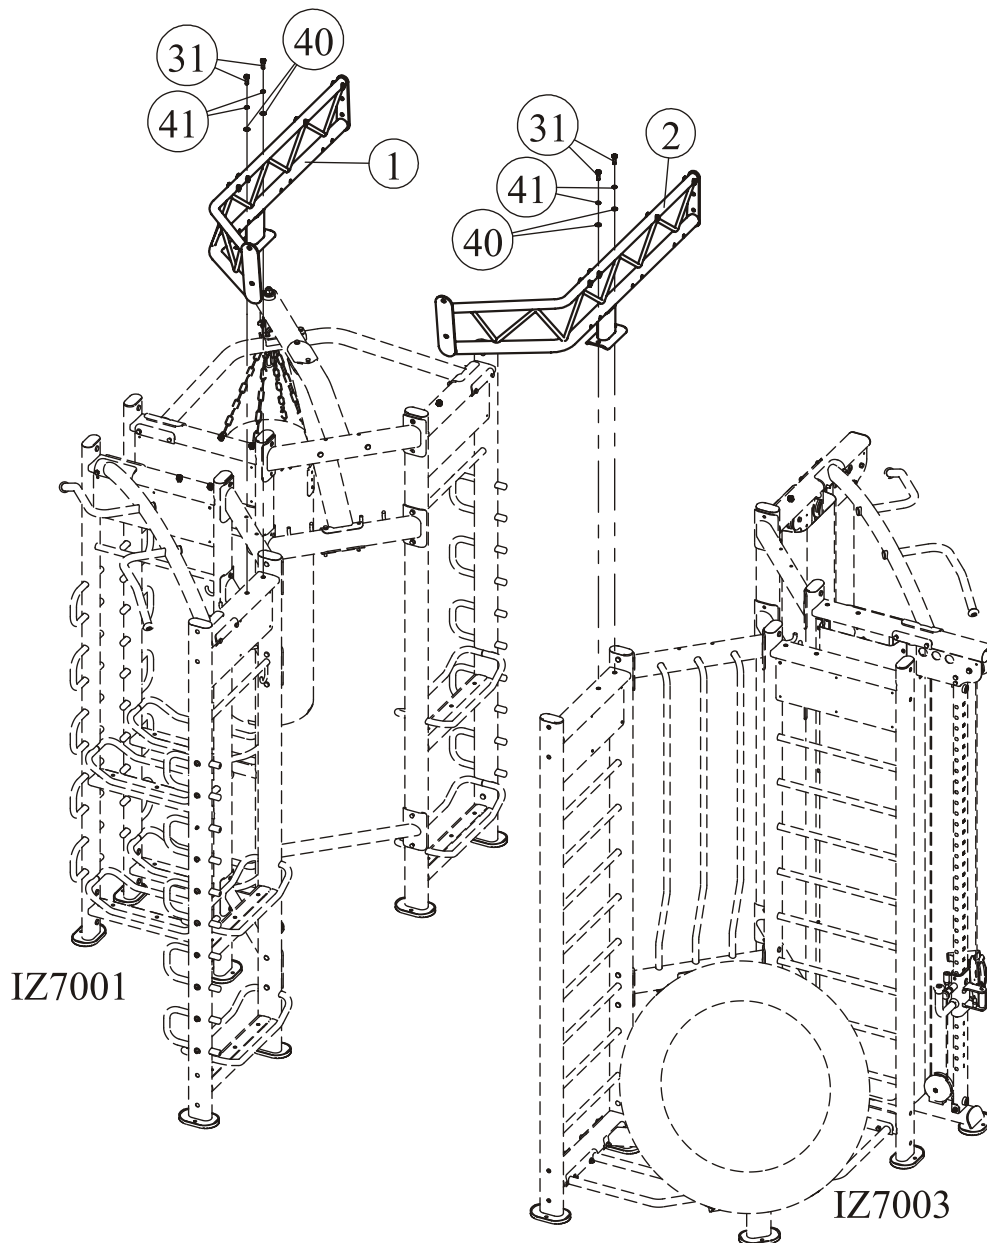

Assembly

STEP 2

1. Attach Left Rings supporting frame (#4) to the IZ7005, using:

- two M10*30 HHB (#31)
- two Spring Washer $\Phi 10$ (#41)
- two $\Phi 11*\Phi 20*2$ Flat Washers (#40)

2. Attach Left Rings supporting frame (#4) to Right Climbing supporting frame (#2), using:

- two M10*35 HHB (#34)
- two M10 Nylon lock Nuts (#39)
- four $\Phi 11*\Phi 20*2$ Flat Washers (#40)


3. Attach Right Rings supporting frame (#5) to the IZ7002B, using:

- two M10*30 HHB (#31)
- two Spring Washer $\Phi 10$ (#41)
- two $\Phi 11*\Phi 20*2$ Flat Washers (#40)

4. Attach Right Rings supporting frame (#5) to Left Climbing supporting frame (#1), using:

- two M10*35 HHB (#34)
- two M10 Nylon lock Nuts (#39)
- four $\Phi 11*\Phi 20*2$ Flat Washers (#40)

Note: To not tighten the screws and Nylon Lock nuts.

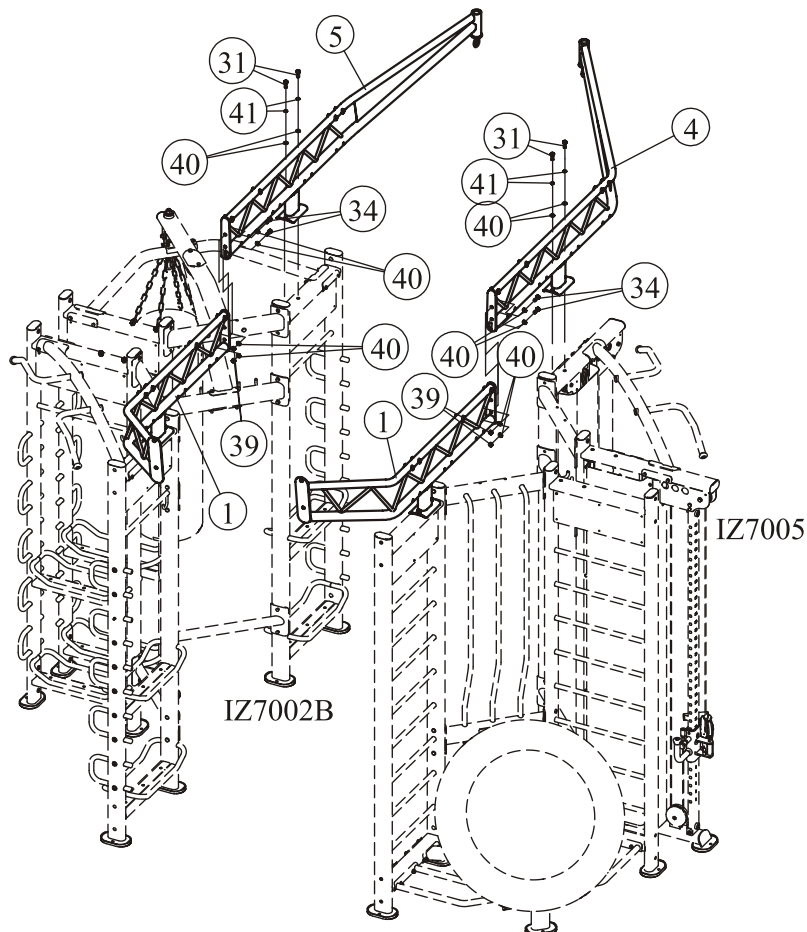


Assembly

STEP 3

1. Attach Fast joint (#42) to the Climbing rope supporting frame (#6).
2. Attach Climbing rope supporting frame (#6) to the IZ7001 & IZ7002B, using:
 - four M10*30 HHB (#31)
 - four Spring Washer $\Phi 10$ (#41)
 - four $\Phi 11 \times \Phi 20 \times 2$ Flat Washers (#40)

Note: To not tighten the screws.

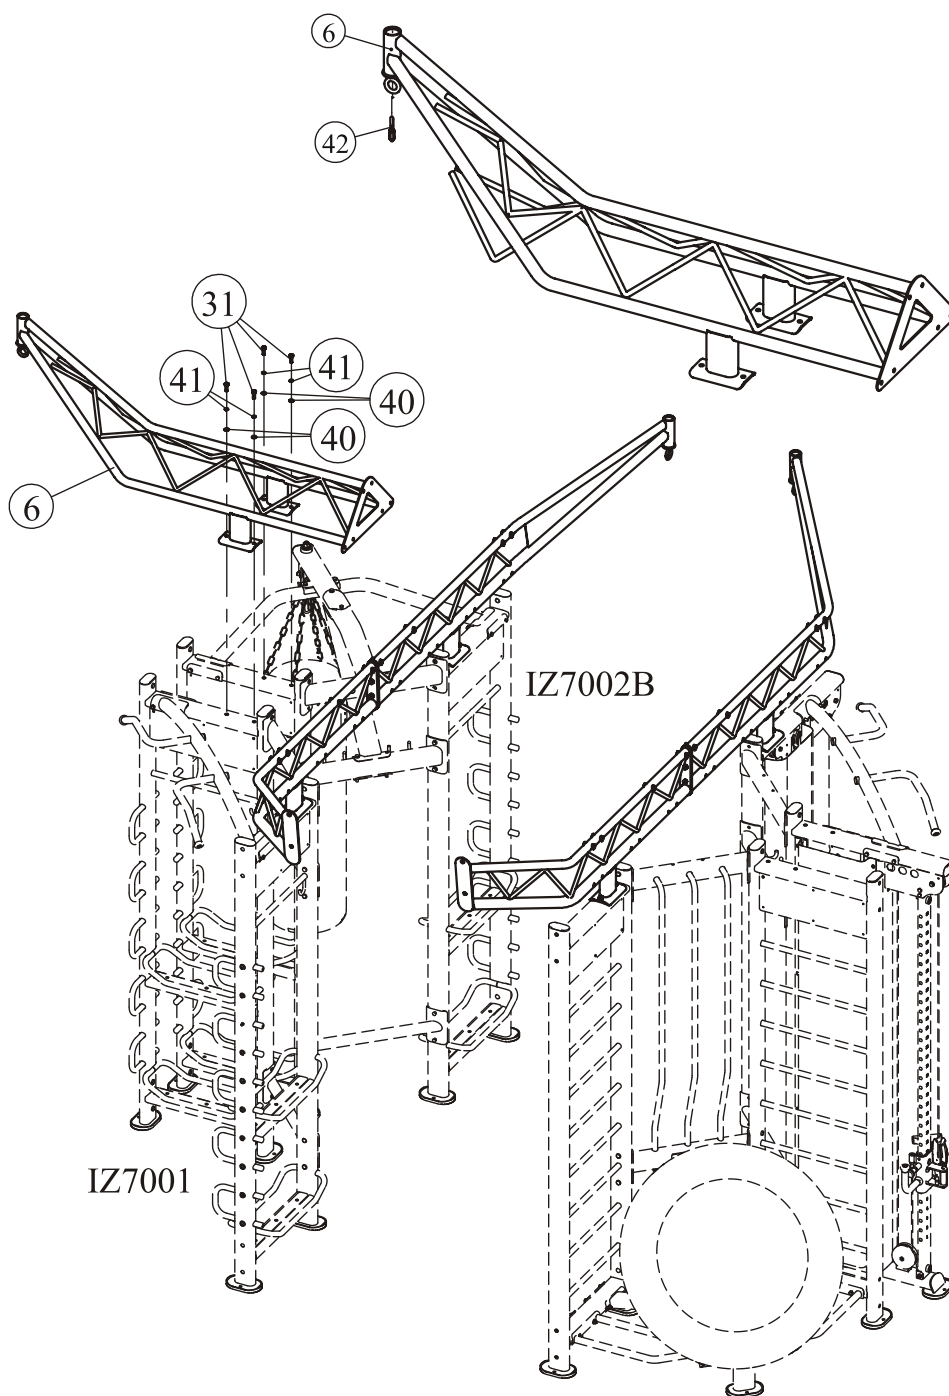


Assembly

STEP 4

Attach Wall ball supporting frame (#7) to the IZ7003 & IZ7005, using:

- four M10*30 HHB (#31)
- four Spring Washer $\Phi 10$ (#41)
- four $\Phi 11*\Phi 20*2$ Flat Washers (#40)

Note: To not tighten the screws.

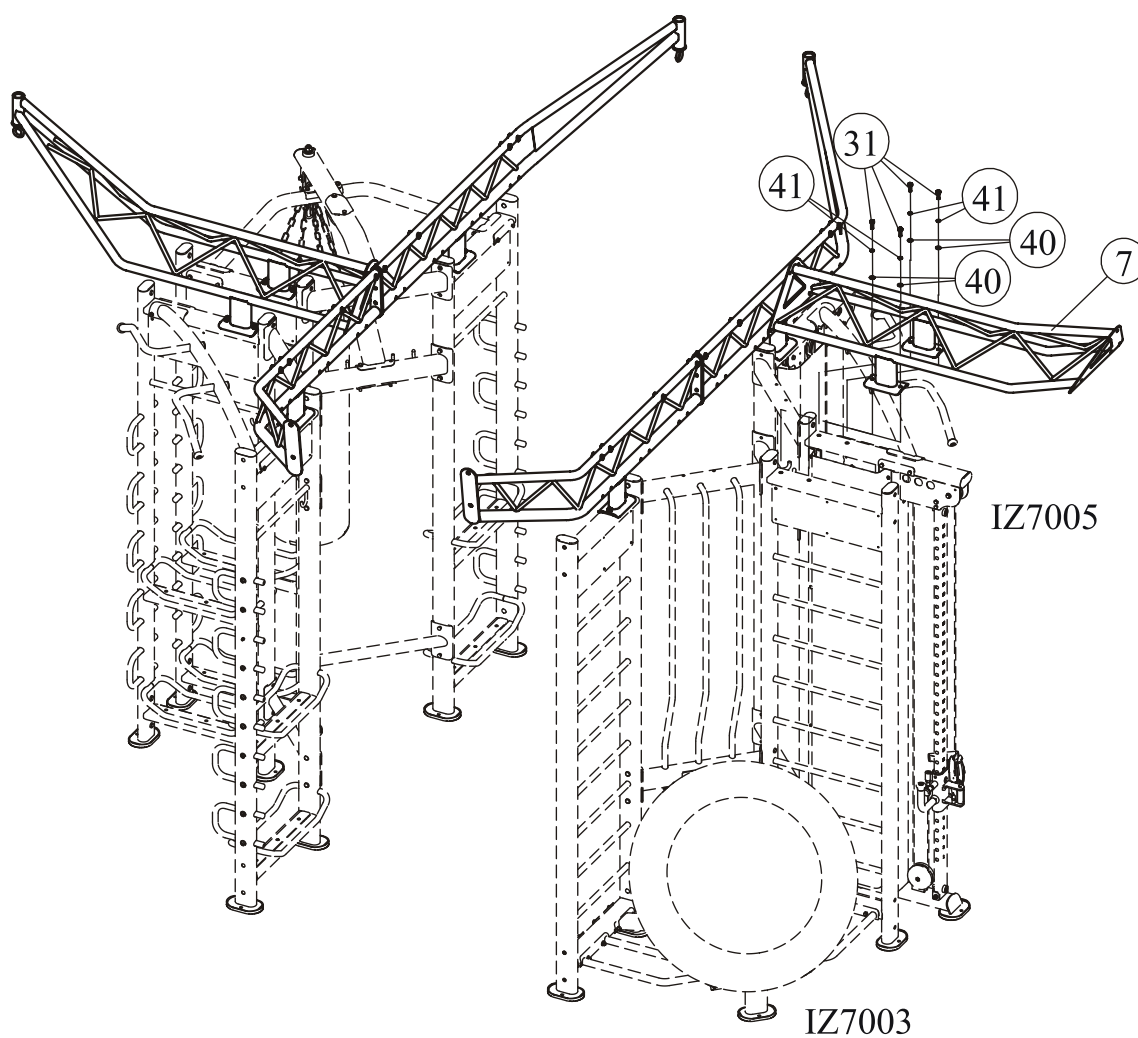


Assembly

STEP 5

Attach Main support frame (#9) to the Left Climbing supporting frame (#1), Right Climbing supporting frame (#2), Left Rings supporting frame (#4), Right Rings supporting frame (#5), Climbing rope supporting frame (#6), Wall ball supporting frame (#7), using:

- four M10*80 HHB (#36)
- four M10*75 HHB (#35)
- sixteen $\Phi 11 \times \Phi 20 \times 2$ Flat Washers (#40)
- eight M10 Nylon lock Nuts (#39)

Note: To not tighten the screws and Nylon Lock nuts.

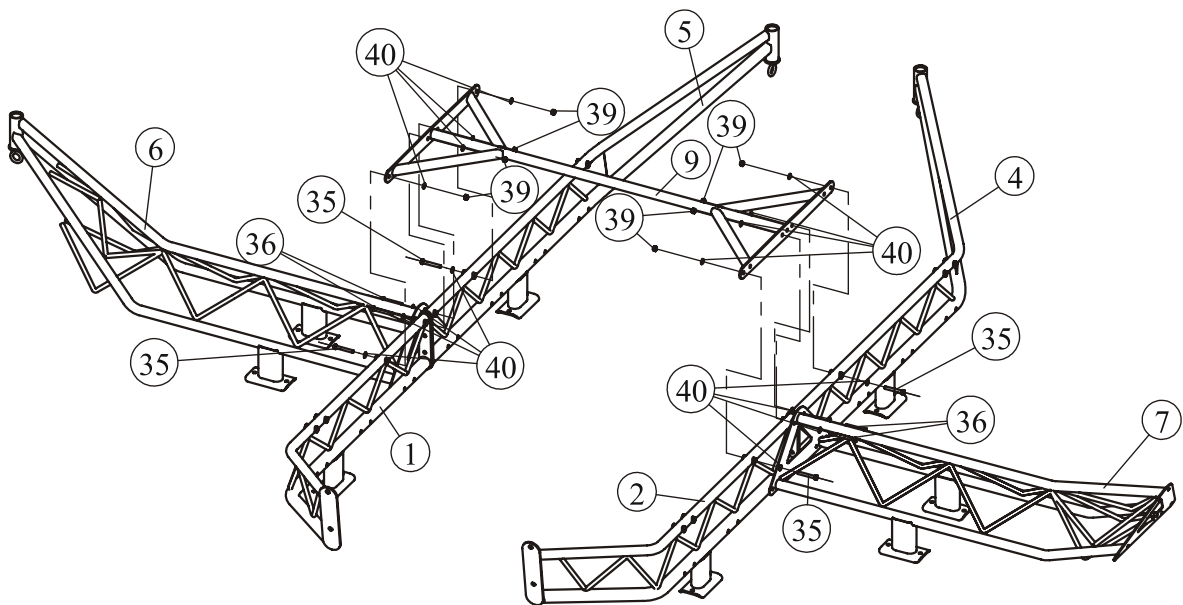

Assembly

STEP 6


1. Attach one Auxiliary support frame (#10) to the Left Rings supporting frame (#4), Right Rings supporting frame (#5), using:

- four M10*75 HHB (#35)
- eight $\Phi 11 \times \Phi 20 \times 2$ Flat Washers (#40)
- four M10 Nylon lock Nuts (#39)

2. Attach one Auxiliary support frame (#10) to the Left Climbing supporting frame (#1), Right Climbing supporting frame (#2), using:

- four M10*75 HHB (#35)
- eight $\Phi 11 \times \Phi 20 \times 2$ Flat Washers (#40)
- four M10 Nylon lock Nuts (#39)

Note: To not tighten the screws and Nylon Lock nuts.

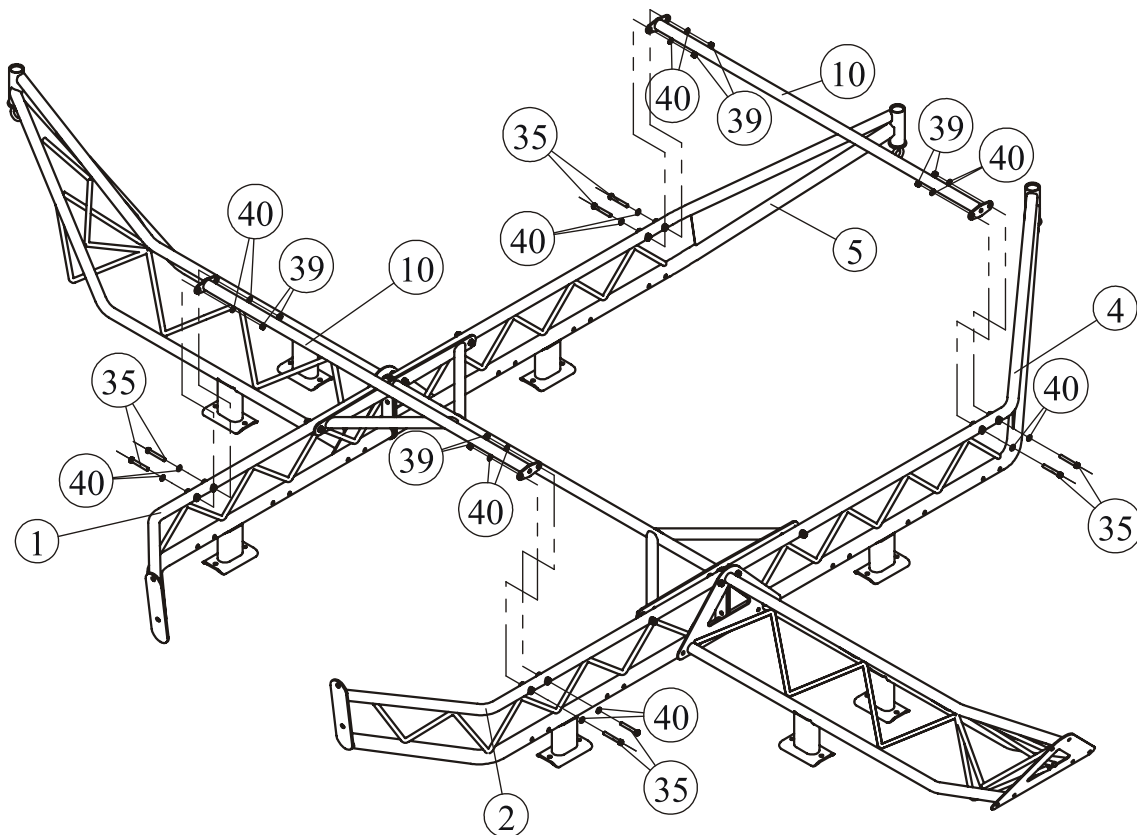

Assembly

STEP 7


1. Attach one Straight ladder beam (#11) to the Left Climbing supporting frame (#1), Right Climbing supporting frame (#2), Climbing rope supporting frame (#6), Wall ball supporting frame (#7), using:

- four M10*80 HHB (#36)
- eight $\Phi 11 \times \Phi 20 \times 2$ Flat Washers (#40)
- four M10 Nylon lock Nuts (#39)

2. Attach one Bending ladder beam (#12) to the Left Rings supporting frame (#4), Right Rings supporting frame (#5), Climbing rope supporting frame (#6), Wall ball supporting frame (#7), using:

- four M10*80 HHB (#36)
- eight $\Phi 11 \times \Phi 20 \times 2$ Flat Washers (#40)
- four M10 Nylon lock Nuts (#39)

Note: To not tighten the screws and Nylon Lock nuts.

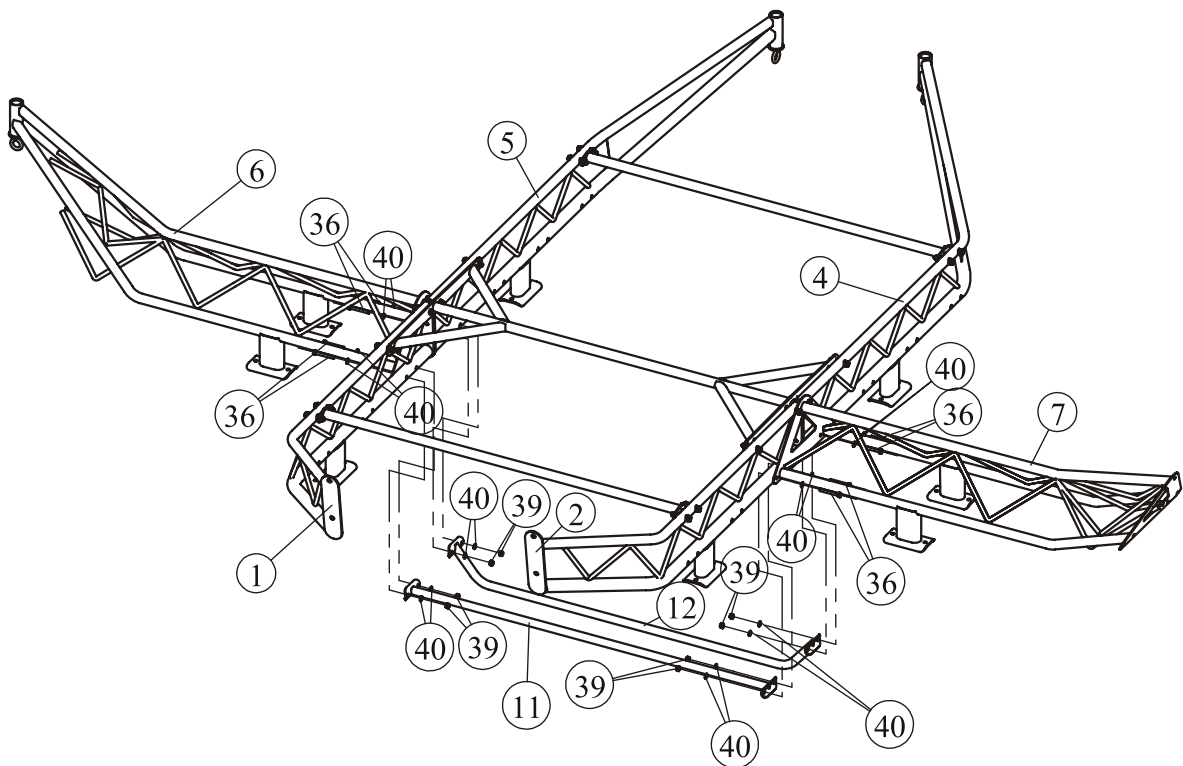

Assembly

STEP 8


1. Attach one Straight ladder beam (#11), one Bending ladder beam (#12) & four Curved plate (#13) to the Left Climbing supporting frame (#1), Right Climbing supporting frame (#2), using:

- eight M10*75 HHB (#35)
- sixteen $\Phi 11*\Phi 20*2$ Flat Washers (#40)
- eight M10 Nylon lock Nuts (#39)

2. Attach two Straight ladder beam (#11), one Bending ladder beam (#12) & six Curved plate (#13) to Left Rings supporting frame (#4), Right Rings supporting frame (#5), using:

- twelve M10*75 HHB (#35)
- twenty-four $\Phi 11*\Phi 20*2$ Flat Washers (#40)
- twelve M10 Nylon lock Nuts (#39)

Note: Tighten all the screws and Nylon Lock nuts.

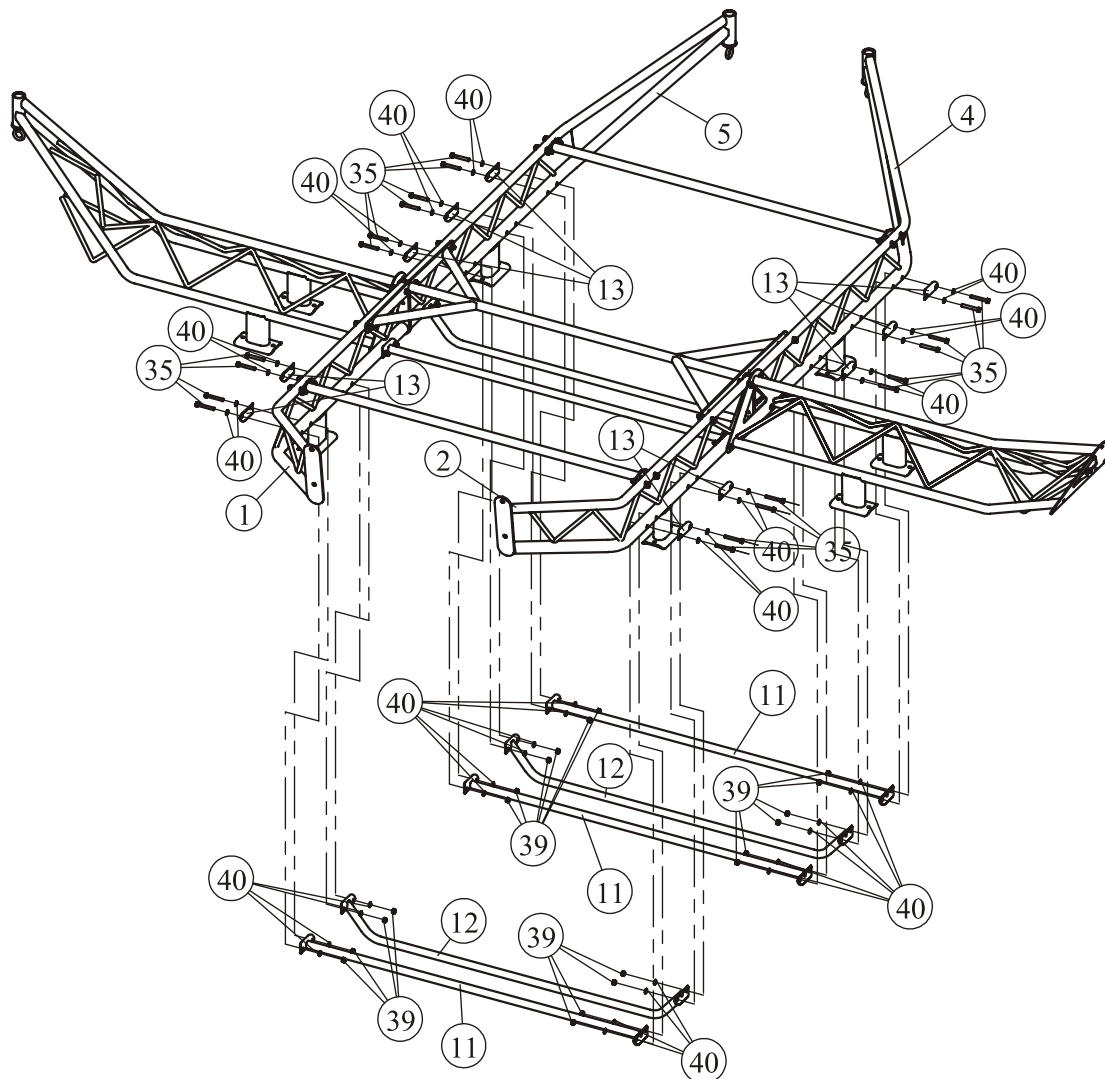


Assembly

STEP 9

Attach Rock climbing Plate ASSY (#3) to the Left Climbing supporting frame (#1), Right Climbing supporting frame (#2), using:

- four M10*50 BHCS (#33)
- four $\Phi 11 \times \Phi 20 \times 21.5$ Flat Washers (#38)
- four M10 Nylon lock Nuts (#37)

Note: Tighten the screws and Nylon Lock nuts.

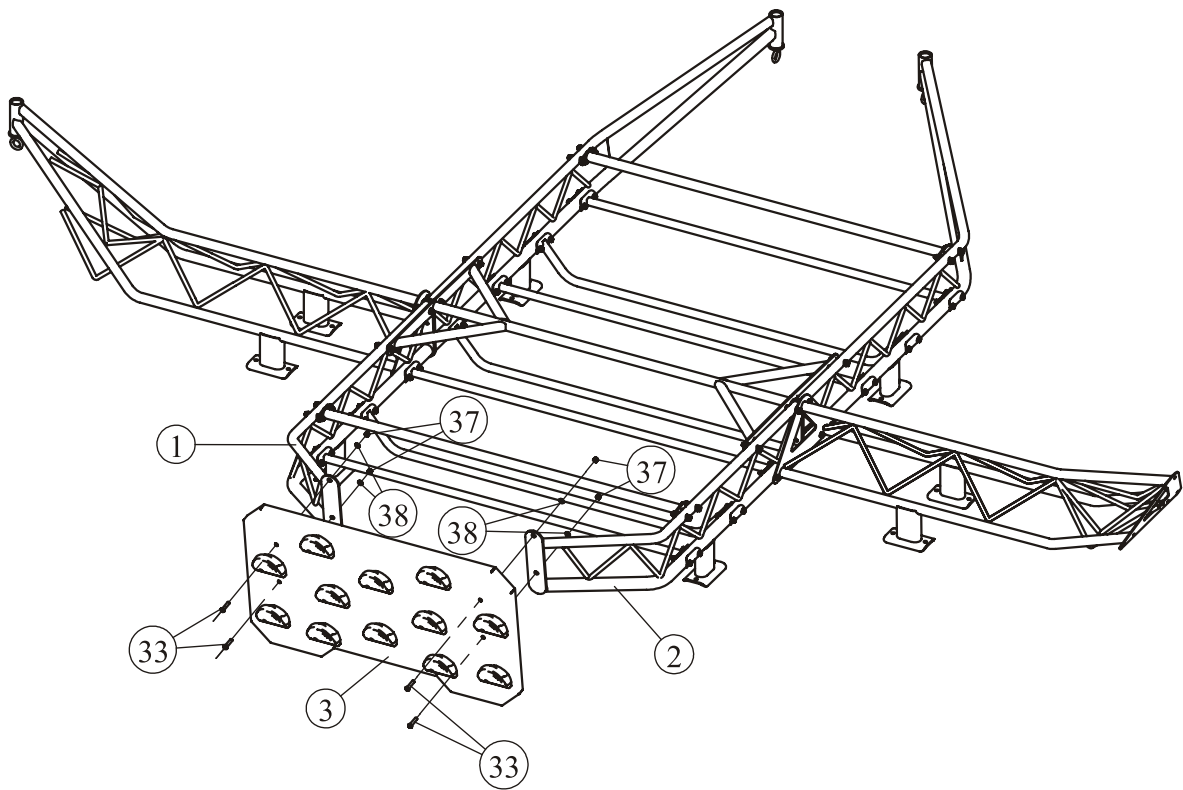


Assembly

STEP 10

Attach Wall ball Frame ASSY (#8) to the Wall ball supporting frame (#7), using:

- four M10*35 FHCS (#32)
- four $\Phi 11*\Phi 20*1.5$ Flat Washers (#38)
- four M10 Nylon lock Nuts (#37)

Note: Tighten the screws and Nylon Lock nuts.

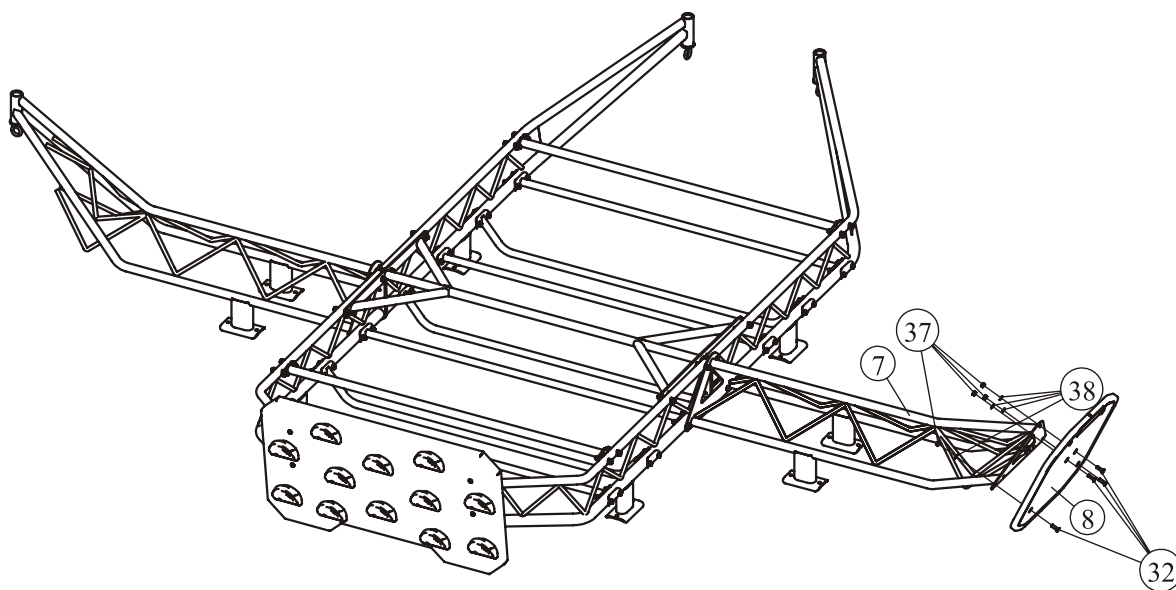


Assembly

STEP 11


1. Removing the bolt & Flat Washers & Spring Washer in the circle (four locations).
2. Attach two Fixed plate (#15) to the IZ7001 & IZ7002B use the bolt & Flat Washers & Spring Washer (the previous step).
3. Attach Inverted support plate ASSY (#16) to the Fixed plate (#15), using:
 - four M10*35 FHCS (#32)
 - four $\Phi 11 \times \Phi 20 \times 21.5$ Flat Washers (#38)
 - four M10 Nylon lock Nuts (#37)

Note: Tighten the screws and Nylon Lock nuts.

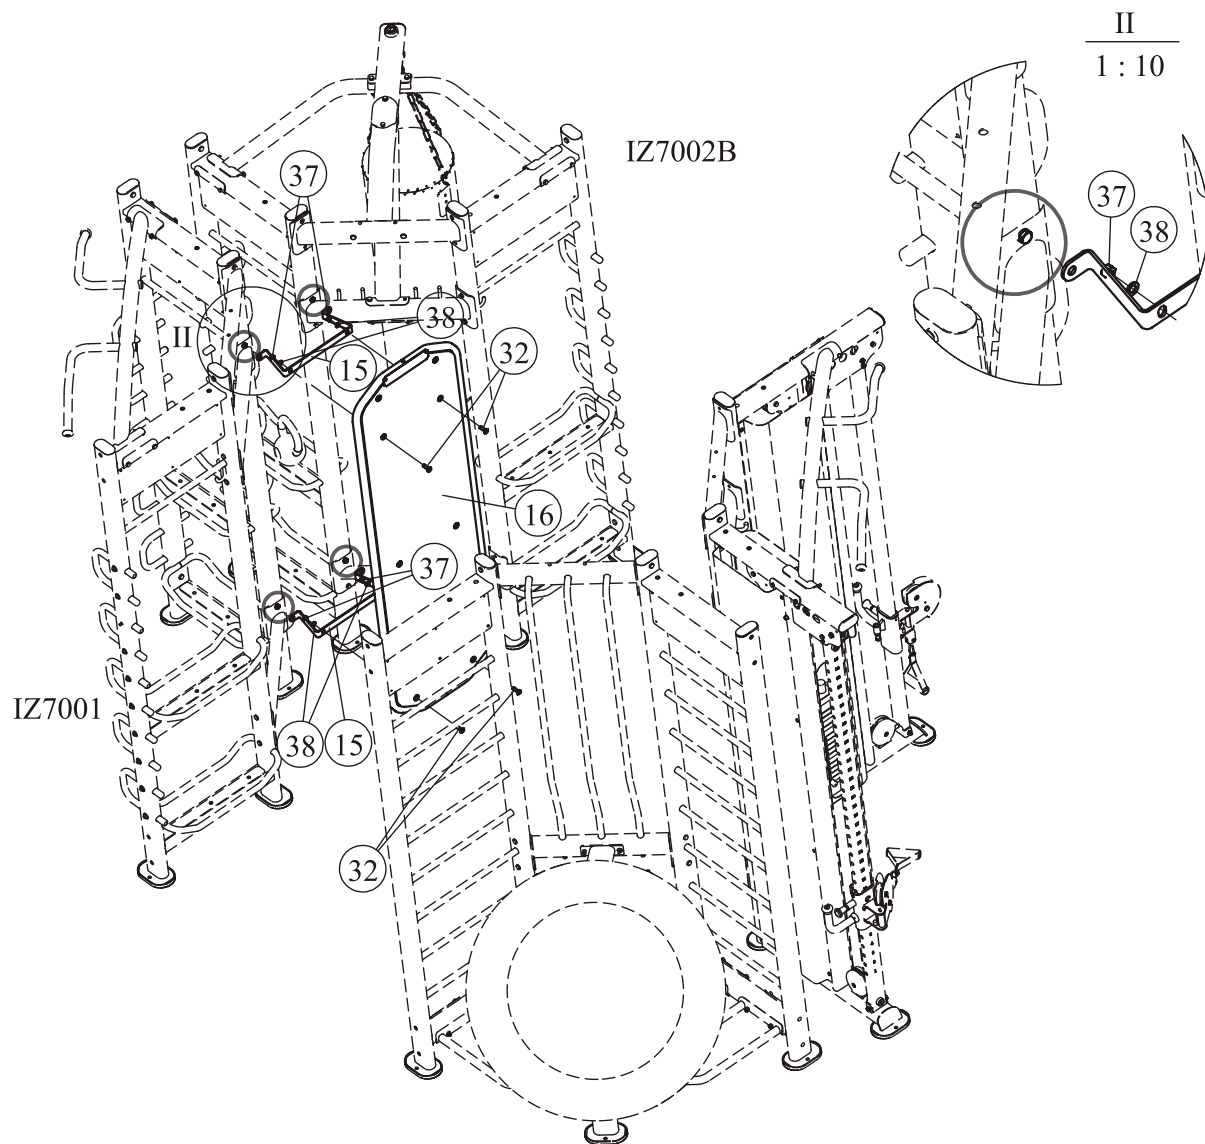

Exercise Instructions

THE PICTURE OF THE INSTALLATION IS COMPLETE.

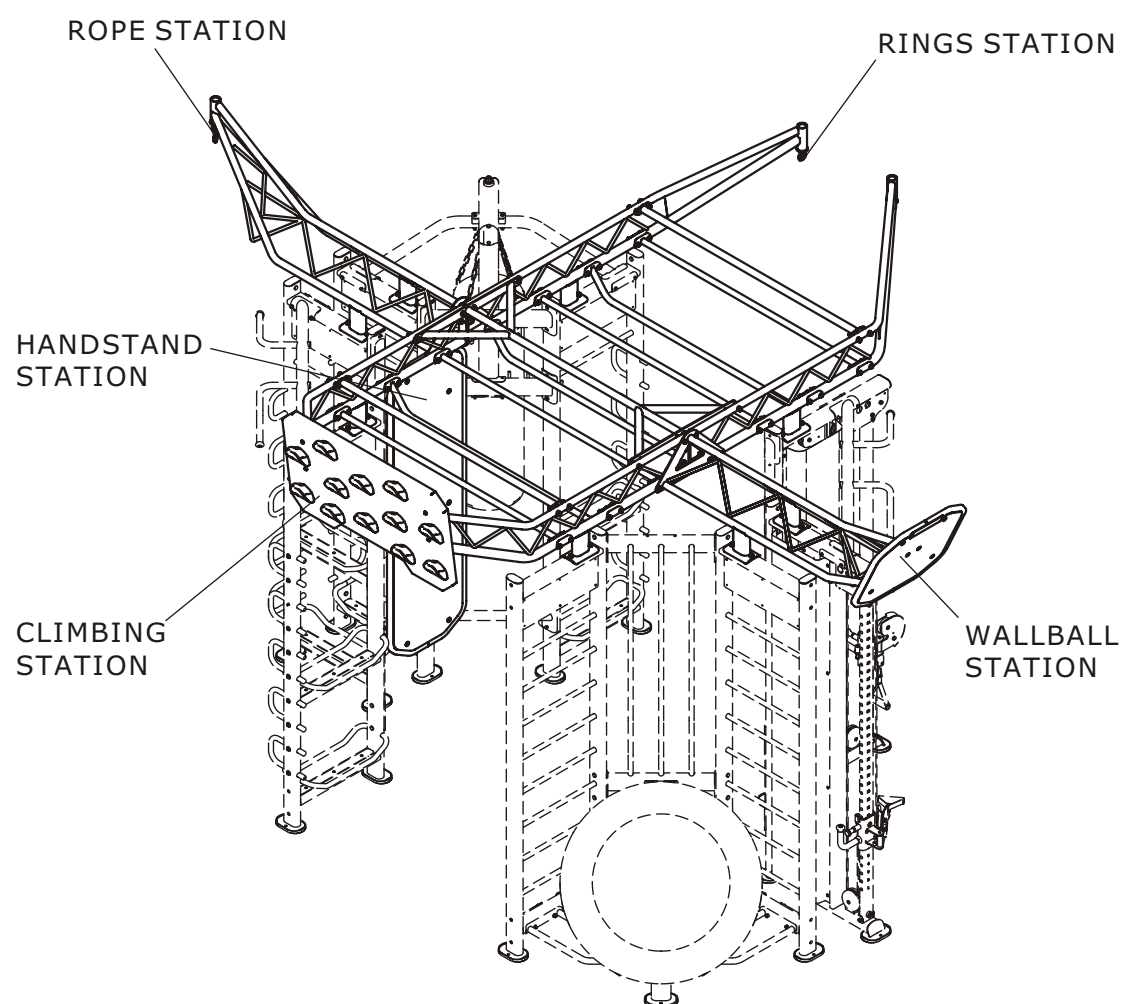

Maintenance Schedule

ROUTINE	COMMERCIAL MAINTENANCE	HOME MAINTENANCE	LATEST DATE ENTRY					
Inspect; Links, Pull Pins, Snap Locks, Swivels, Weight Stack Pins	DAILY	WEEKLY						
Clean; Upholstery	DAILY	WEEKLY						
Inspect; Cables or Belts and their tension	DAILY	WEEKLY						
Inspect; Accessory Bars, and Handles	WEEKLY	3 MONTHS						
Inspect; All Decals	WEEKLY	3 MONTHS						
Inspect; All Nuts and Bolts, Tighten if needed	WEEKLY	3 MONTHS						
Inspect; Anti-Skid Surface	WEEKLY	3 MONTHS						
Clean & Lubricate; Guide Rods with a Teflon (PTFE) based lubricant (Superlube)	MONTHLY	3 MONTHS						
Lubricate; Seat Sleeves, Turcite Bushings, Linear Bearing	MONTHLY	3 MONTHS						
Clean and Wax; All Glossy Finishes	6 MONTHS	YEARLY						
Repack with Grease; Linear Bearings	6 MONTHS	YEARLY						
Replace; Cables, Belts and Connecting Parts	YEARLY	3 YEARS						

Your equipment comes with a commercial maintenance decal. For personal, in home use, please follow the home maintenance schedule listed above.

General Maintenance Information

Links, Pull-Pins, Snap Hooks, Swivels, Weight Stack Pins:

- * Check all pieces for signs of visible wear or damage.
- * Check springs in snap hooks and pull-pins for proper tension and alignment.
- * If the spring sticks or has lost its rigidity, replace it immediately.

Upholstery:

- * To ensure prolonged upholstery life and proper hygiene, all upholstered pads should be wiped down with a damp cloth after every workout.
- * Periodically take the time to use a mild soap or an approved vinyl upholstery cleaner to deter the onset of cracking or drying. Avoid using any abrasive cleaners or cleaners not intended for use on vinyl.
- * Replace ripped or worn upholstery immediately.
- * Keep sharp or pointed objects clear of all upholstery.

Decals:

- * Inspect and familiarize yourself with any safety warnings or other user information posted on each decal.

Nuts and Bolts:

- * Inspect all nuts and bolts for any loosening and tighten if needed.
- * Go through a re-tightening sequence periodically to ensure that all hardware is tensioned proper.

Anti-Skid Surfaces:

- * These surfaces are designed to supply secure footing and need to be replaced if they appear worn or become slippery.

Belts and Cables:

- * We use only high quality belt, and mil-spec cables.
- * Visually inspect the belts and cables for fraying, cracking, peeling or discoloration.
- * While the machine is not in use, carefully run your fingers along the belt or cable to feel for thinning or bulging areas.
- * Replace belts and cables immediately at the first signs of damage or wear. Do not use equipment until belts or cables have been replaced.

Belt and Cable Tension:

- * Referring to the Owners Manual, when belts or cables are used check all bolts attachments to be sure they are properly attached.
- * Check slack in cables and re-adjust cable tension if needed.

Seat Sleeves, Guide Rods:

- * Wipe down adjusting tubes with a dust free rag before applying lubricant.
- * Lubricate seat sleeves and Guide Rods with a Silicon or Teflon based lubricant spray.

Linear Bearings:

- * Referring to the Owners Manual carefully disassemble the bearing from its housing and place a finger full of light grease (lithium, super lube, etc.) into the inside of the bearing. Using your finger, press the grease into the ball-bearings and their tracks. Repeat until the ball-bearing tracks are full of grease. Insert the shaft back into the bearing and wipe off excess grease.

PLEASE KEEP THIS FOR YOUR RECORDS

Weight Training Tips

Use this manual to guide you through the basic exercises you can perform on your equipment. To gain maximum results and avoid possible injury, consult a fitness professional to develop your complete exercise program.

Always consult your physician before starting any exercise program.

To be successful in your exercise program, it is important to develop an understanding of the basic principles of strength training. Now that you have your equipment, it is only natural that you want to get started immediately. First, determine a set of realistic goals and objectives for yourself. By deciding on an exercise plan that is right for you prior to starting, you will contribute significantly to your success.

Warm up properly before engaging in weight resistance training. Stretching, yoga, jogging, calisthenics or other cardiovascular exercise can help prepare your body for the heavier workload of lifting weights.

Learn how to perform the exercise correctly before using heavy weight. Correct form is important to avoid injury and to ensure that you work the proper muscle groups.

Know your limitations. If you are new to weight training or are embarking on an exercise regimen after a long layoff, start slowly and build foundational strength over a longer period of time.

Pay attention to your breathing. Exhale when you exert is a general rule of thumb. Never hold your breath.

